




Glide Elbow

With our patent-pending Glide Elbow™ mechanism, installation and removal of your fabric is completed with the use of a wrench or cordless drill with an appropriate sized socket. Not only does our Glide Elbow™ make updating fabric easier, it allows you to easily remove fabric for severe weather. Additionally, metal-on-metal wear is minimized with our fabric hook connection.

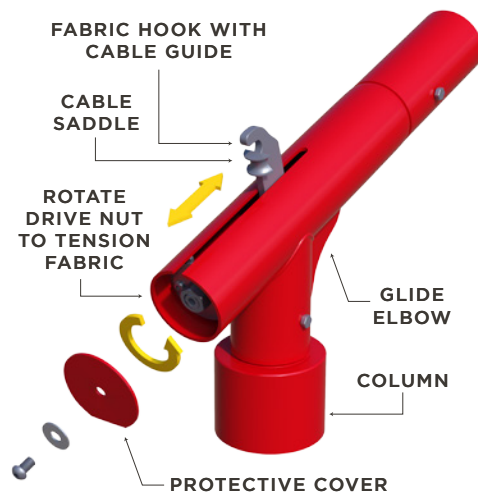

Glide Elbow™ Fabric Removal Process



Step 1: Use a small Allen wrench to remove the protective cover to reveal the drive nut inside of the elbow.



Step 2: Use a wrench or power drill with appropriately sized socket to loosen the tension by rotating the drive nut. Remove fabric.